

# DURAG

**D-GT 810**

**D-GT 800**

## Flame sensor

**Flame sensor for the monitoring of gas and oil flames, primarily in gas turbines or in particularly harsh environments**

### Features

- Optionally available with air/water cooling
- Deployable with high combustion chamber overpressure
- High vibrational stability.
- D-GT 800**
- Conforms to general safety regulations
- Self-monitoring and fail-safe in conjunction with a control unit/burner control
- Connection to the D-UG 120, D-UG 660 control unit and the D-GF 150 burner control.
- D-GT 810**
- Analysis of the d.c light component of the flame radiation
- Analysis with extremely fast reaction times
- Connection to any control unit with 2-wire transmitter 4...20mA.

### Applications

- Burners with difficult installation conditions for conventional flame sensors or on those whose environmental temperature near the sighting tube is very high
- Power stations
- Chemical industry
- Refineries
- Cement plants
- Waste incinerators
- Steam generators
- Heating plants
- Gas turbines.

### Certifications (only D-GT 800)

- DVGW
- GOST-R
- PTB (ATEX).

### DURAG, Inc.

1355 Mendota Heights Rd  
Suite 200  
Mendota Heights, MN 55120

Phone: 651-451-1710  
1-800-811-9852  
Fax: 651-457-7684

Email: flame@durag.com  
www.durag.com

**DURAG smart solutions for GROUP combustion and environment**



D-GT 800-P

### Functional description

With its combination of highly sensitive photo element and sturdy design, the D-GT 800/810 flame sensor is ideal for use in harsh environments such as in gas turbines. The photodiode used can detect almost all blue burning flames, such as gas flames having only a low radiation component in the visible range.

The D-GT 800/810 is available with different photo element for optimal selectivity when using different fuels.

### Models

- Cable connection (-Ex)
- Axial plug (-P).


### Accessories

- UV-A, UV-B and IR test light source** 230 V/50 Hz (D-ZS 093)
- Terminal box** for connecting the flame sensor (D-ZS 140, D-ZS 141).

### Flame sensor selection

| Flame sensor     | Suitable for |     | Features  |
|------------------|--------------|-----|---|
|                  | Gas          | Oil |   |
| D-GT 800/810 UAF | ○            | ++  | with intensive ambient light (neighbouring burners) |
| D-GT 800/810 UA  | +            | ++  | at low NO <sub>x</sub> component                    |

++ ideally suited + well suited ○ conditional suited ! not permitted (from experience)

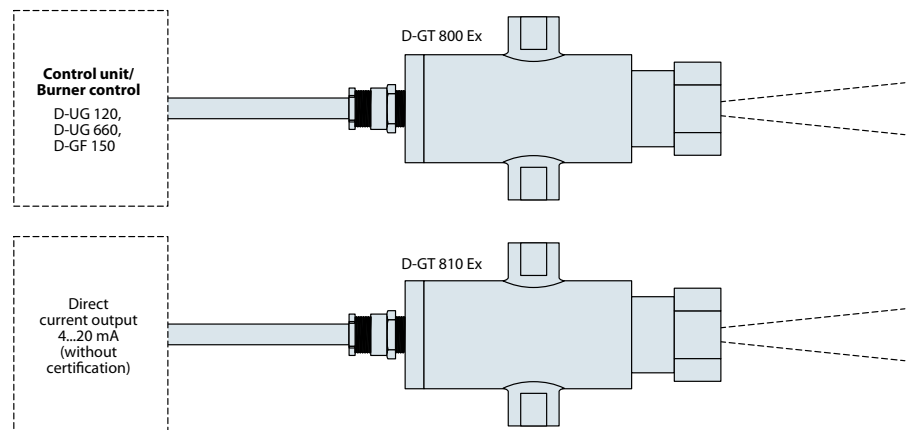

|                                 |  |                                      |   |
|---------------------------------|--|--------------------------------------|---|
| Operational mode D-GT 800       | Intermittent operation, continuous operation and 72-hour operation without permanent supervision | Perm. ambient temperature            | Without cooling: 0...+120°C<br>Air cooling: -20...+200°C<br>Water cooling: -20...+300°C |
| Operational mode D-GT 810       | 4...20 mA / 100 Ohm at 18 VDC<br>700 Ohm at 30 VDC   | Vibration                            | 10 g  |
| Safety                          | Self-monitoring and fail-safe in conjunction with a control unit/burner control                  | Dimensions                           | Ø100 mm; length approx. 190 mm  |
| Protection                      | With cable gland (D-GT 800/810-P) IP67,<br>Ex-Version (D-GT 800/810/Ex) IP66                     | Weight                               | Without cooling: approx. 1.5 kg,<br>with cooling: approx. 2.0 kg                        |
| Ex-Protection (D-GT 800/810 Ex) | II 2G Ex d T4/T5/T6  | Max. combustion chamber overpressure | 30 bar  |
| Spectral range                  | UV   | Sighting tube connection             | ¾" NPT (F)  |
| Viewing angle                   | 6°   | Cooling connection                   | ½" NPT (F)  |